


# WINDOW 30



Double seal brush between upright and plateholder

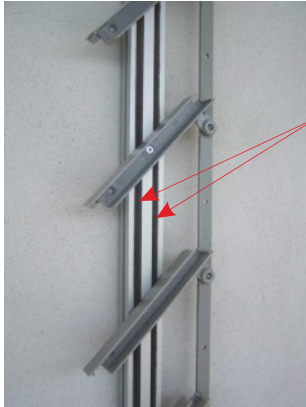

## TECHNICAL DATA

10mm, anti UV , alveolar polycarbonate plates

In the plates' border there is a particular aluminum outline running lengthwise to make the plate itself stronger and to seal the plates hermetically (see pic.1)

Plates-holders pivot on side uprights, rectangular shaped, made in PVC or aluminum.

Uprights joined together by crossbar made in anodized aluminum

Plates-holders are linked between themselves through a nylon connecting rod

## CENTRAL FULCRUM MODEL

**WINDOW 30...BG** (aluminum crossbars + gasket)

**WINDOW 30...G** (aluminum "L" shape crossbar + gasket)

**WINDOW 30...** (aluminum crossbar no gasket)

MODEL	N° OF PLATES	WINDOW'S HEIGHT (cm)
WINDOW 30/1 BG	1	30
WINDOW 30/2 BG	2	58
WINDOW 30/3 BG	3	86
WINDOW 30/4 BG	4	113
WINDOW 30/5 BG	5	141
WINDOW 30/6 BG	6	169
WINDOW 30/7 BG	7	197
WINDOW 30/8 BG	8	224
WINDOW 30/9 BG	9	251
WINDOW 30/10 BG	10	279

## CONFIGURATION

**WINDOW 30** / n° of plates / contact / open

Example:

**WINDOW 30 / n° of plates / contact / opening**

1	6
2	7
3	8
4	9
5	10


BG  
G

W

WINDOWS' length size is made according to customer request.


**CONTACT**

**BG** = Aluminum crossbar + 3 cm borders + gasket (1)

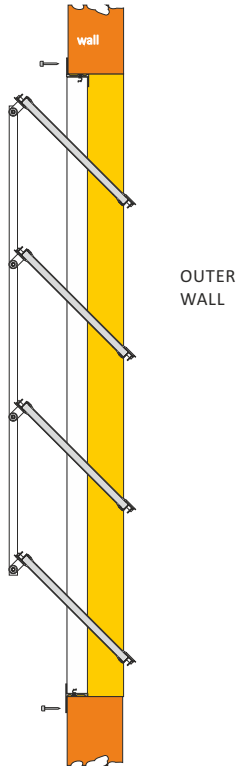


Example  
WINDOW30/4 BG

**G** = Aluminum crossbar "L" shape + gasket (1)

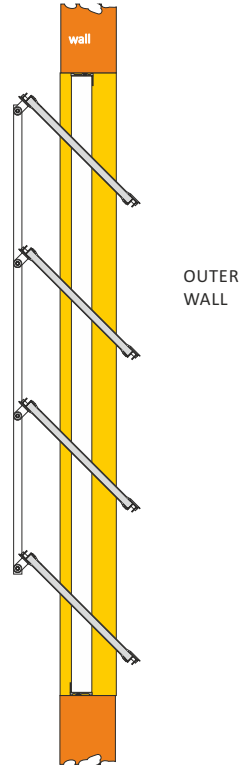

Example  
WINDOW30/4 G


Aluminum crossbar "L" shape + gasket (1)

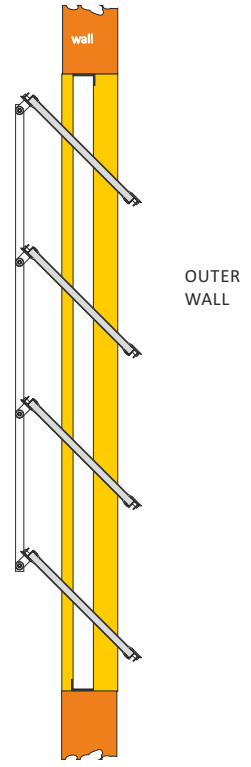


Example  
WINDOW30/4

(1) SAME VERSIONS FOR THE MODELS  
WINDOW30/.../W E WINDOW30/.../1W


Example  
WINDOW 30/4 BG  
MANUAL CONTROL

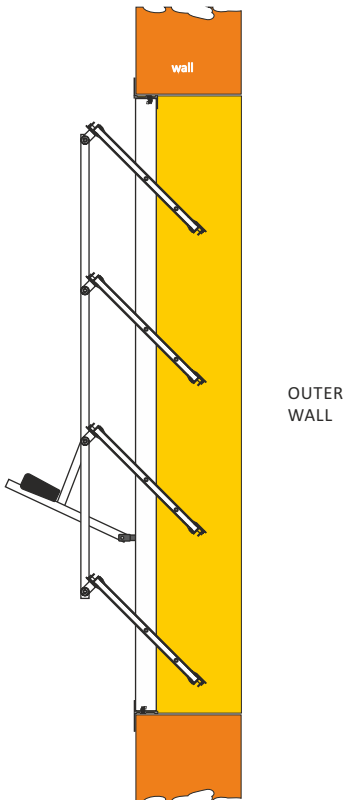

Example  
WINDOW 30/4 BG  
WITH REDUCTION GEAR

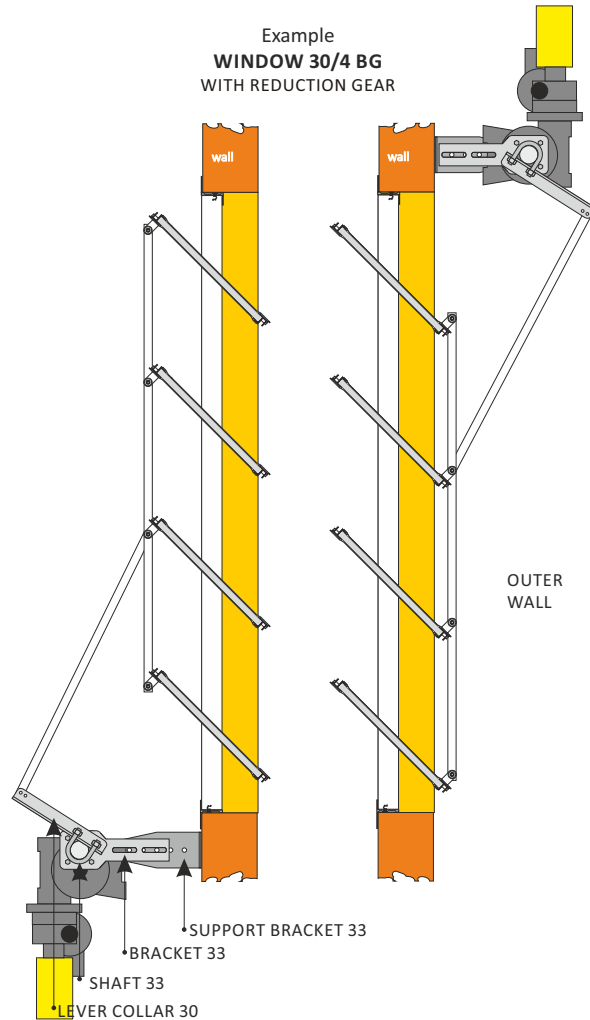

**OPENING**

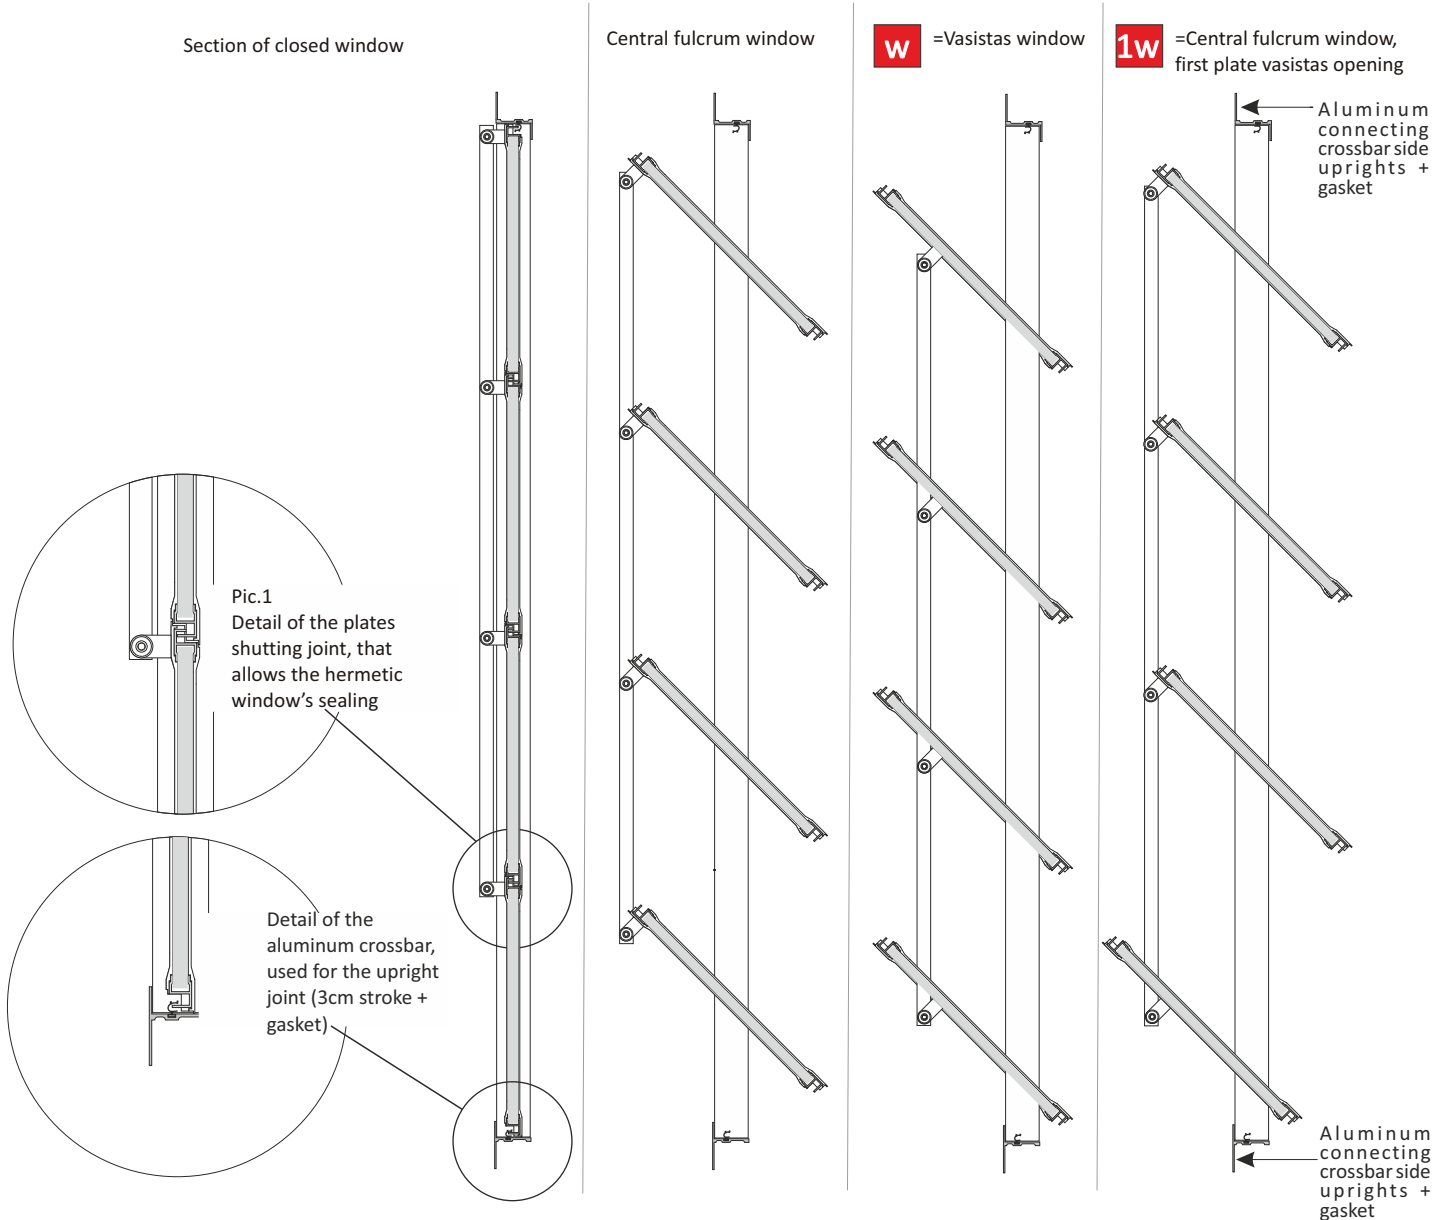

**AUTOMATION WITH GEARMOTORS**



The most commonly used window movements are as follows:

- ⑩ Manually with one handle for all the slats present in the window height, or, in groups of slats each with its own handle
- ⑩ Automatically by means of control units that control gearmotors that rotate a shaft with levers that operate the opening/closing of the windows. The maximum length of the shaft is approximately 25m on each side of the gearmotor.
- ⑩ Automatically through control units that control small servomotors. Each servomotor is able to operate up to 6/7 m<sup>2</sup> of fenestration.